# TRAILER MOUNTED BOOM LIFT

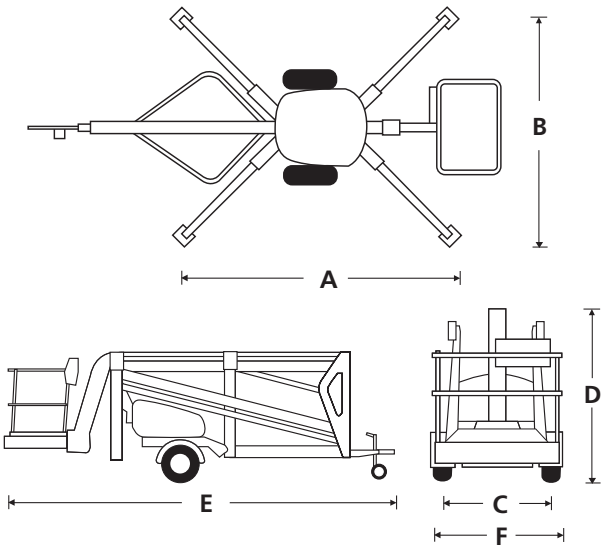
# TL49J

| DIMENSIONS | TL49J |
|---|---|
| Max. working height | 17.0m |
| Max. platform height | 15.0m |
| Max. working outreach | 9.1m |
| Platform width (**C**) | 1.20m |
| Platform depth | 0.80m |
| Outrigger footprint (**A x B**) | 4.65m x 4.65m |
| Towing width (**F**) | 1.75m |
| Towing length (**E**) | 7.10m |
| Stowed height (**D**) | 2.10m |

| PERFORMANCE | |
|---|---|
| Platform capacity (SWL) | 200kg |
| Jib length | 1.3m |
| Jib arc | 130° |
| Platform rotation | 160° |
| Turret rotation (non-continuous) | 680° |
| Wheels | 205/75RI6 |
| Controls | hydraulic proportional |

| POWER | |
|---|---|
| Power source | 24V battery (4 x 6V 195ah batteries) or 230V mains |
| Power options | bi-energy (diesel/petrol and DC battery power) |

| WEIGHT | |
|---|---|
| Gross weight (battery model) | 2250kg |



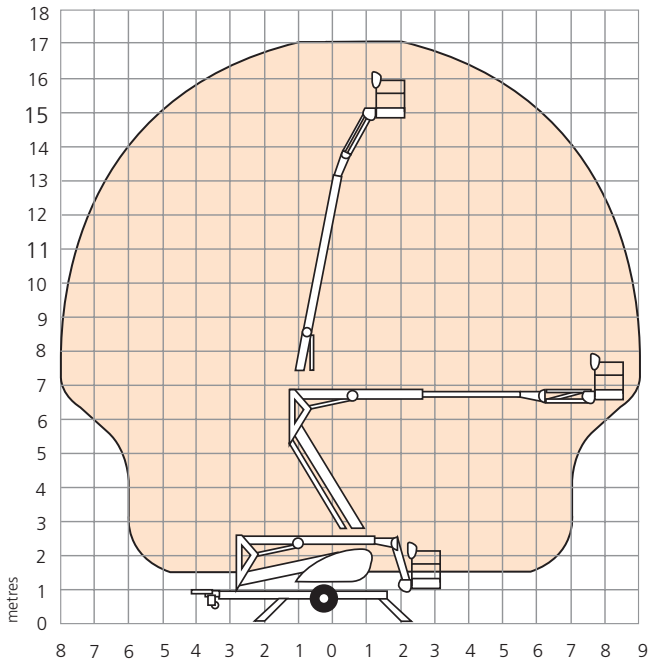

## STANDARD FEATURES

- 1.3m jib with 130° working arc
- In-line boom design for maximum rigidity
- Hand pump emergency lowering from platform
- 160° powered platform rotation
- Proportional live hydraulic controls
- Power line to platform (no sockets)
- 24V battery (4 x 6V 195ah batteries) or 230V mains power
- Automatic reversing and overrun braking
- Integral road lighting board
- CE approved

## OPTIONS

- Special paint colours
- Hydraulic friction drive assist system
- On-board 230V generator for mains powered units
- Bi-Energy (diesel/petrol and DC battery) power
- GRP platform

## WORKING ENVELOPE




Sales
Rental
Service
HELI.be
Vantegemstraat 9 | B-9230 Wetteren | +32 9 368 80 80 | info@heli.be

snorkel
Vigo Centre, Birtley Road,
Washington, Tyne & Wear,
NE38 9DA, U.K.
t: +44 (0) 845 1550 057
e: sales@snorkellifts.com
www.snorkellifts.com

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance.